




Bank Approved

Westsound Bank is located in Sequim, Washington, nestled along the picturesque Strait of Juan de Fuca at the northern end of the Olympic Peninsula.

When it comes to scrutinizing finances, you can count on banks to be thorough. This case is no exception. Architects for Washington's Westsound Bank specified warm, inviting cherry hardwood ceilings. Luckily, the contractor's construction superintendent recalled an ad for wood paneling that could deliver on both appearance and cost. That's when Contact Industries got the call.

Contact's tongue and groove veneer-wrapped paneling was ideal for the job. Not only did the architects achieve the atmosphere they desired, the builders benefited from the clear, consistent and easy-to-install 16-foot panel lengths. As for the bank president, there was only one thing to say about Contact's lower overall installed cost: approved.

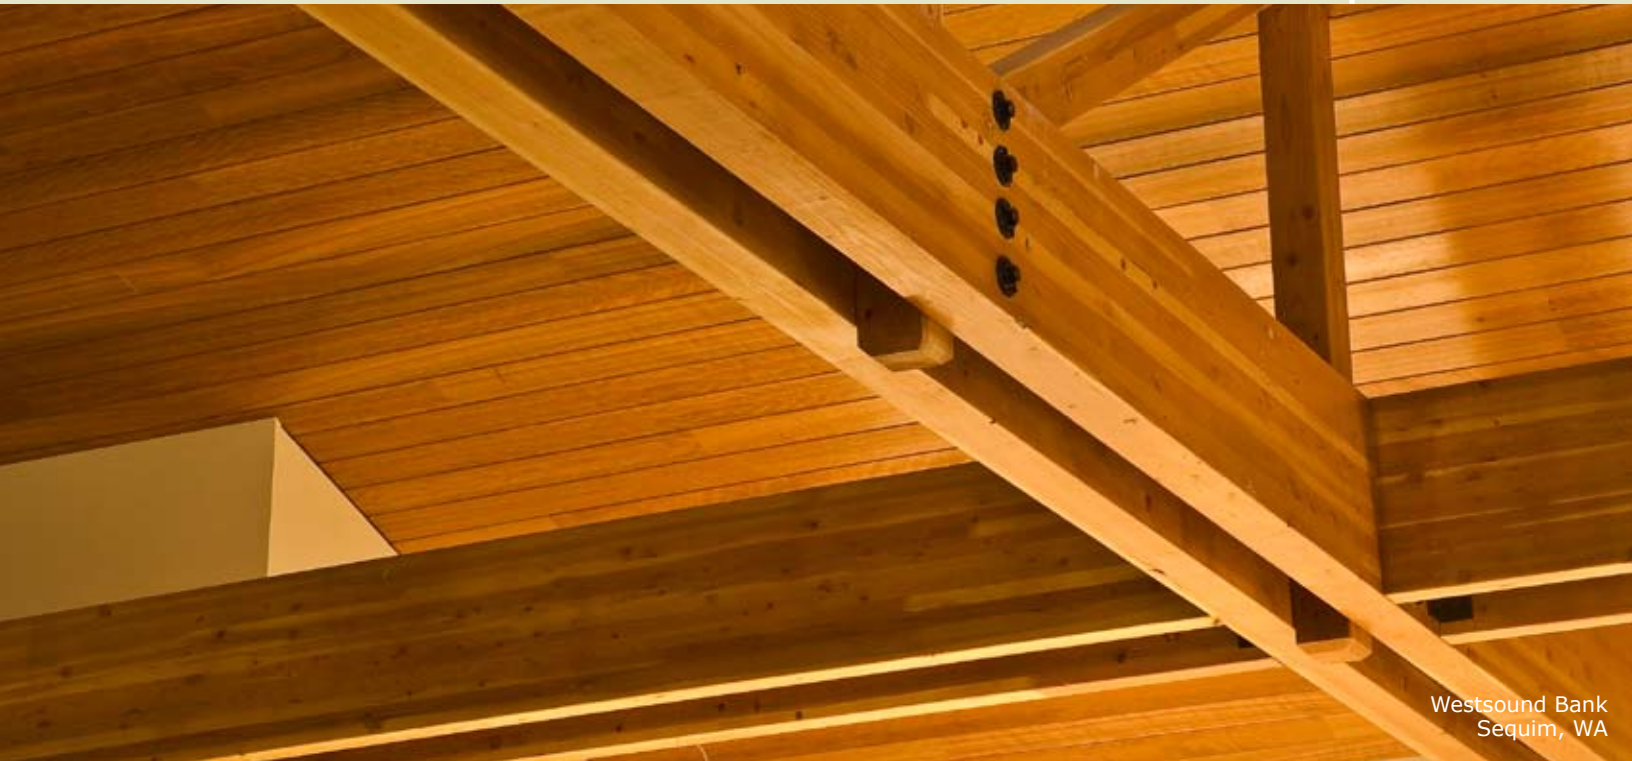

Westsound Bank
Sequim, WA



PROJECT PROFILE

PROJECT: Westsound Bank, Sequim, WA

Client: Edensaw Woods
Details: 207 pieces at 198"
57 pieces at 123"
4,000 total lineal feet

PRODUCT: Wood-wrapped T&G paneling

Construction: 1"x6" fingerjoint pine core with cherry hardwood veneer
Adhesive: Type 1 Hot Melt
Test procedures: Boil test
End use: Ceiling
Core: Finger-jointed pine
Face veneer: Cherry



Contact Industries' Custom Profile-wrapped Products

Contact offers a full range of profile-wrapped solutions for a wide variety of industries. These include: architectural mouldings; window components; door jambs, stiles and rails; as well as a variety of components for fixture and cabinet manufacturers. Many of these products are custom-designed to meet the specific requirements or requests of the customer. Specifications for Contact's wrapped products:

Substrate: Virtually any material, including finger-jointed pine, LVL, MDF, extruded aluminum, or PVC. Substrates are extruded or edge-glued and profiled prior to wrapping.

Veneer: Any wood species, including oak, cherry, maple, fir, alder, and a wide variety of exotics. Veneers are fleece-backed; standard thickness is .024". Vinyl, stainable or finished, and impregnated cellulose (film), printed to look indistinguishable from real wood, are also available.

Size: Up to 10" wide and 16' lengths (18-footers on request).

Finishing: Wood veneers can be pre-finished with stain and/or top coat and an environmentally friendly UV cure.

Some standard moulding profiles are sold through distribution. Call for details.



Contact Industries is Forest Stewardship Council Chain of Custody Certified SCS-COC-001260



Contact Industries
9200 SE Sunnybrook Blvd., Suite 200
Clackamas, OR 97015
800-547-1038
Fax 503-221-1340
www.contactind.com

